HP LaserJet Enterprise P3010 Printer series





Get fast, high performance printing with advanced security features and expand with your changing business needs. Ideal for businesses that need to print high volumes and confidential documents on a variety of media types.

Ideal for the IT or department manager in managed office environments, particularly in security-focused businesses, such as legal firms and government agencies, supporting small work teams of 8-10 users that require fast, high quality, output.

Count on HP for performance and durability.

Get output quickly with print speeds up to 40 ppm A4 and a first page out as fast as 7.5 seconds. Instant-on Technology provides up to a 50 percent faster warm-up time from low-power mode 1 and up to 50 percent energy savings over competitive models 2. Quickly process and share large, complex files with a 540 MHz processor, up to 640 MB expandable memory, and gigabit networking 3. All-in-one Original HP print cartridges with built-in intelligence deliver consistently outstanding results.

Get peace of mind with advanced security features.

Control network access with 802.1X which allows device authentication prior to network admission and gives you more unified control. Secure business-critical data with support for IPv4 and IPv6 protocols³ and IPSec with encryption accelerator assist for fast authentication and point-to-point encryption across your IP network. Easily retrieve stored confidential print jobs using the menu and key pad on the control panel. Protect sensitive data: add a secure hard disk⁴ to the open EIO slot.

Gain the flexibility to expand with your business.

Extend your printer's capabilities as your business needs change with an open EIO slot and three host Hi-Speed USB 2.0 ports. Add memory up to 512 MB, for total memory of up to 640 MB.

Improve your productivity with a 1,600-sheet maximum input capacity⁵. Add an optional 500-sheet paper tray⁴ for better media handling. Meet your business needs with robust paper handling: automatically print on different types and sizes of media up to A6, with easy-to-load, adjustable paper trays.



² Results are based on internal HP testing using the ENERGY STAR® program's Typical Electricity Consumption (TEC) method Test data was extended to one year Testing was on a single unit of each product Individual product configuration will affect power consumption



HP LaserJet Enterprise P3015d Printer



HP LaserJet Enterprise P3015dn Printer



HP LaserJet Enterprise P3015x Printer

³ Available with dn and x models only


⁴ Not included, please purchase separately

⁵ The P3015d and dn models have a 600-sheet standard input capacity, two 500-sheet trays may be added; x model has an 1 100-sheet standard input capacity, an additional 500-sheet tray can be added.

Product walkground

HP LaserJet P3015X printer shown

- 1. Intuitive control panel with four-line LCD display, 10-number key pad, and "Show-Me-How" menu
- 2. 250-sheet top output bin
- 3. One-door access to the easy-to-install print cartridge
- 4. 100-sheet multipurpose tray handles a variety of special
- 5. Two 500-sheet input trays for a 1,100-sheet total input capacity
- 6. Hardware integration pocket for connecting optional HP or partner solutions
- 7. Host USB 2.0 port for walk-up USB printing
- 8. HP Jetdirect 10/100/1000 Ethernet embedded print server 9. 128 MB memory expandable to 640 MB, and a 540 MHz
- processor
- . 10. One open EIO slot
- 11. Hi-Speed USB 2.0 port for direct connection to printer
- 12. 100-sheet straight-through path supports special papers
- 13. Built-in automatic two-sided printing

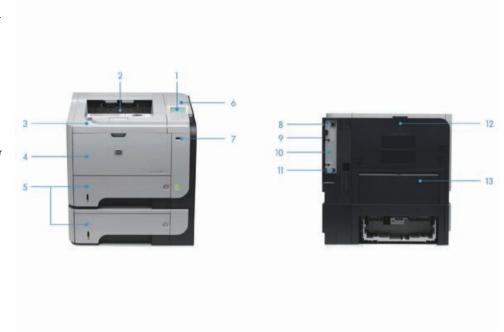

Series at a glance



HP LaserJet Enterprise P3015d Printer

- 128 MB RAM (max 640 MB)
- 540 MHz processor
- up to 1200 x 1200 dpi
- standard input capacity of 600 sheets with 100-sheet multipurpose tray (Tray 1) and one 500-sheet input tray (Tray 2)
- recommended monthly print volume 1500 to 5000 pages
- duty cycle up to 100000 pages
- automatic duplex printing & a 10-number key pad



HP LaserJet Enterprise P3015dn Printer

• HP LaserJet P3015d: print speed of up to 40 ppm • HP LaserJet P3015dn: as d model with HP Jetdirect Gigabit Ethernet embedded print server



HP LaserJet Enterprise P3015x Printer

• HP LaserJet P3015x: as dn model plus a 500-sheet input tray for a 1100-sheet total input capacity

Recommended accessories



CE530A HP LaserJet 500-sheet Feeder/Tray Enhance productivity with a simple-to-install paper tray that allows you to print more pages without reloading paper and keep two

different types of paper

loaded.



CE981A HP Hardware Integration Pocket Cable This HP Hardware Integration Pocket Cable offers the opportunity to easily integrate optional security solutions like security card swipe and authentication devices.



CE483A HP 512 MB 144-pin x32 DDR2 DIMM Improve printing performance of complex documents by enhancing data flow with HP memory upgrades.



18019A HP Secure High Performance EIO Hard Disk Securing your business means protecting information. With the HP High-Performance Secure EIÖ Hard Disk with a Kensington-style lock, you can easily help secure valuable data at rest on your HP printer or MFP and still achieve optimal performance.



17972G HP 1284B Parallel Card Giving you the flexibility to continue to support parallel devices, the HP 1284B Parallel Card is a parallel port interface for compatible HP peripherals. The card fits easily into an open EIO slot of the peripheral.



18007G HP Jetdirect 690n IPv6/IPSec 802.11g Wireless Print Server The HP Jetdirect 690n Wireless 802.11g Print Server provides both wireless or wired connectivity. Get advanced authentication and encryption through IPsec. Enjoy broad compatibility, robust security and easy management in the IT environment.

HP Global Solutions Catalogue

HP Global Solutions partners deliver and integrate a wide range of business printing solutions: Products can be mixed, matched and customized. Solutions include: E-forms and stationery, Barcodes and cheque printing (OCR and MICR), Printing from SAP R/3 and ERP packages, Secure printing, Host printing, Cost-controlled printing and copying, Print job accounting and special industry solutions. Go to www.hp.com/eur/gsc for more information.

Ordering information



CE981A J8007G

J7961G

J7951G

HP LaserJet Enterprise P3015d Printer (CE526A) Printer, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer



HP LaserJet Enterprise P3015dn Printer (CE528A) Printer, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer



HP LaserJet Enterprise P3015x Printer (CE529A) Printer, 500-sheet Feeder/Tray, right-angled power cord, control panel overlay, software and documentation on CD-ROM, print Cartridge CE255A, Getting Started Guide, support flyer

Accessories, Supplies and Support

Accessories					
CE530A	HP LaserJet 500-sheet Feeder/Tray				
CE483A	HP 512 MB 144-pin x32 DDR2 DIMM				
J8019A	HP Secure High Performance EIO Hard Disk				
J7972G	HP 1284B Parallel Card				
CC413A	HP 64 MB 144-pin x32 DDR2 DIMM				
CC414A	HP 128 MB 144-pin x32 DDR2 DIMM				
CC415A	HP 256 MB 144-pin x32 DDR2 DIMM				
Supplies					
CE255X	HP LaserJet CE255X Black Print Cartridge Average cartridge yields 12,500 standard pages. Declared yield value in accordance with ISO/IEC 19752*				
CE255A	HP LaserJet CE255A Black Print Cartridge Average cartridge yields 6000 standard pages. Declared yield value in accordance with ISO/IEC 19752*				
Connectivity					

HP Hardware Integration Pocket Cable

HP Jetdirect 635n IPv6/IPsec Print Server

HP Jetdirect 690n IPv6/IPSec 802.11g Wireless Print

HP Jetdirect ew2400 802.11g Wireless Print Server

Service & support			
UP872E HP Care Pack, Next-Business-Day LaserJet P3015			
Hardware Support, 3 years			
UP874E HP Care Pack, Next-Business-Day LaserJet P3015			
Hardware Support, 4 years			
UP876E HP Care Pack, Next-Business-Day LaserJet P3015			
Hardware Support, 5 years			
UP439PE HP Care Pack, Post Warranty Next-Business-Day LaserJet			
P3015 Hardware Support, 1 year			
For a complete list of supplies, accessories and services, please			

refer to http://www.hp.com



Technical specifications

Print technology	Monochrome Laser					
Print speed	A4black: Up to 40					
		: As fast as 7.5 sec (from ready mode)				
	Exact speed varies depending on the system configuration, software application, and document complexity.					
Processor	540 MHz, Motorolo					
Memory	128 MB, Expandable to 640 MB through 1 industry standard 144-pin DIMM slot					
Print resolution	Up to 1200 x 1200 dpi					
Print quality	300 dpi, 600 dpi, l	HP FastRes 1200, HP ProRes 1200				
Printer languages	HP PCL 5e, HP PCL 6, HP Postscript level 3 emulation, direct PDF (v 1.4) printing					
Economical printing	Economode (saves toner), return to Powersave mode after print job due to instant-on fuser technology (saves electricity), duplex and N-up printing (saves paper)					
Typefaces/fonts	PCL: 103 internal font set (plus Greek, Hebrew, Cyrillic, Arabic); PS: 93 internal font set (plus Greek, Hebrew, Cyrillic, Arabic)					
Duty cycle (monthly, A4)	Up to 100000 pag	es				
Print margins	top: 6 mm, left: 5 mm, right: 5 mm, bottom: 6 mm					
Media handling	Input	Capacity	Weight	Size		
	Tray 1	sheets: 100, envelopes: 10, transparencies: 75	60 to 199 g/m² (straight-through paper path for special media)	A4, A5, A6, B5 (JIS), envelopes, letter, legal, executive; 76 x 127 to 216 x 356 mm		
	Tray 2	sheets: 500	60 to 120 g/m ²	A4, A5, A6, B5 (JIS), letter, legal, executive; 105 x 148 to 216 x 356 mm		
	Tray 3 (optional)	sheets: 500	60 to 120 g/m ²	A4, A5, A6, B5 (JIS), letter, legal, executive; 105 x 148 to 216 x 356 mm		
	Output:					
	Duplex printing:					
Media types	Paper (bond, colour, letterhead, plain, preprinted, prepunched, recycled, rough), envelopes, labels, cardstock, transparencies, user-defined					
Interface and connectivity	P3015d: 1 Hi-Speed USB 2.0, 1 external Host USB, 2 internal Accessory ports for HP and partner solutions, 1 EIO slot; P3015dn: 1 HP Jetdirect 10/100/1000 Base-TX					
,	10/100/1000 Bas	print server, 1 Hi-Speed USB 2.0, 1 external Host Ue-TX Ethernet embedded print server, 1 Hi-Speed Uct FIO internal print servers. HP letdirect external pr	SB 2.0, 1 external Host USB, 2 internal Accessor	y ports for HP and partner solutions, 1 EIO slot;		
Operating systems compatibility	<u>'</u>	optional: HP Jetdirect EIO internal print servers, HP Jetdirect external print servers, HP 802.11b/g wireless print servers, HP EIO Parallel Port Adaptor Microsoft® Windows® 2000 (SP4), XP Home, XP Professional, Server 2003, Server 2008; Windows Vista®, x64; Mac OS X v10.3.9, v10.4.3, v10.5, v 10.6; Novell®				
	NetWare; RED HAT Linux 7.x or higher; SUSE Linux 8.x or higher; Linux (see http://www.hplip.net) Optional: Microsoft® Windows® 2000, XP Home, XP Professional; Windows Vista®; OS/2; UNIX; Linux (see http://www.hplipopensource.com); HP OpenVMS					
Network operating systems compatibility	Microsoft® Windows® 2000, Server 2003, Server 2008, XP Home, XP Professional, 2003 64-bit, XP 64-bit; Windows Vista®, 64-bit (For IPv6 compatible					
, ,,	with Microsoft® Windows® 2003, XP, Server 2008; Windows Vista®); Novell® 5.1 or higher; Mac OS X v10.3, v10.4, v10.5 or higher; RED HAT Linux 7.x or higher; SUSE Linux 8.x or higher; Linux (see http://www.hplip.net); HP-UX 10.20, 11.x, 11.i; Solaris® 2.5 or higher (SPARC® systems only); IBM® AIX 3.2.5 or higher; MPE-IX, Citrix® MetaFrame Server; Windows® Terminal Services					
Security management	Management Security: SNMPv3, SSL/TLS, 802.1X authentication (EAP- PEAP, EAP-TLS), IPP over TLS, IPsec/Firewall with Certificate, Pre-Shared Key Authentication, and					
,g	Kerberos Authentication. Support for WJA-10 IPsec Configuration using IPsec Plug-in					
Minimum system requirements	Microsoft® Windows® 2000 (SP4), XP, Server 2003; Windows Vista®, 200 MB available hard disk space; USB 2.0 port or IEEE 1284-4 compliant parallel port; CD-ROM					
-1	drive, Mac OS X v 10.3.9; v10.4.3; v10.5; v10.6; 200 MB available hard disk space; USB 2.0 port or IEEE 1284-4 compliant parallel port; CDROM drive					
Software	EVO Discrete PCL 6 (based on EVO 4.7); Product specific Universal Print Drivers Postscript, static install (based on EVO 4.7)					
Control panel	2.29 x 5.33 cm 4 line LCD display, 3 light-emitting diode (LED) indicator lights (Ready, Data, Attention), buttons (10 numeric keys, Information, Return, Stop/Cancel, OK, Toggle up/down)					
Printer management	HP Web Jetadmin, HP LaserJet Utility, HP Embedded Web Server, HP Easy Printer Care					
Power	Requirements: Input voltage: 100 to 127 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz); 220 to 240 VAC (+/- 10%), 50/60 Hz (+/- 2 Hz). Consumption: 780 watts (active), 14.5 watts (standy), 8.5 watts (powersave), 0.6 watts (off). Typical electricity consumption (TEC) 3.267 kWh/Week					
	Out of package: P3015d: 448 x 412 x 316 mm; P3015dn: 448 x 412 x 316 mm; P3015x: 448 x 412 x 480 mm Packaged: P3015d: 600 x 500 x 439 mm; P3015dn: 600 x 500 x 439 mm; P3015x: 600 x 500 x 676 mm					
Dimensions (w x d x h)			39 mm; P3015x: 600 x 500 x 676 mm			
	Packaged: P3015d: Out of package: P3					
Dimensions (w x d x h) Weight Operating environment	Packaged: P3015d: Out of package: P3 Packaged: P3015d: Operating temperat	: 600 x 500 x 439 mm; P3015dn: 600 x 500 x 4: 015d: 15.9 kg; P3015dn: 15.9 kg; P3015x: 21.2 : 19.9 kg; P3015dn: 19.9 kg; P3015x: 26.1 kg ure: 15 to 32.5° C. Recommended operating temp mperature: -20 to 40° C. Storage humidity: 10 to 9	2 kg erature: 15 to 32.5° C. Operating humidity: 10 to	o 80% RH. Recommended operating humidity: 30 tc:: LwAd 6.8 B(A). Sound pressure: LpAm54 dB(A),		
Weight	Packaged: P3015d: Out of package: P3 Packaged: P3015d: Operating temperat 70% RH. Storage te 48dB(A) in quiet mac Safety certifications	: 600 x 500 x 439 mm; P3015dn: 600 x 500 x 4: 015d: 15.9 kg; P3015dn: 15.9 kg; P3015x: 21.2 : 19.9 kg; P3015dn: 19.9 kg; P3015x: 26.1 kg ure: 15 to 32.5° C. Recommended operating temp mperature: -20 to 40° C. Storage humidity: 10 to 9	erature: 15 to 32.5° C. Operating humidity: 10 to 20% RH. Noise level per ISO 9296: Sound power EU); IEC 60825-1+A1+A2; GS License (Europe);	: LwAd 6.8 B(A). Sound pressure: LpAm54 dB(A), EN 60825-1+A1+A2 (Class 1 Laser/LED Device)		

http://www.hp.com/uk













